


# A.P. LOCK : SAPL-A SERIES



SAPL-A

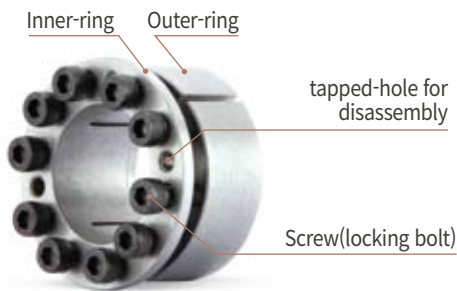

SAPL-AK



SAPL-AS


## Structure and Material for SAPL-A Series

Model	Body (Inner-ring / Outer-ring)		Screw(locking bolt)	
	Material	Surface Treatment	Material	Surface Treatment
SAPL-A	STEEL	-	SCM435	Black Oxide
SAPL-AK	STEEL	Electroless Nickel Plating	SCM435	Electroless Nickel Plating
SAPL-AS	SUS304	-	SUSXM7	-


## Product Features

- Self-centering function (prevention of slight off-center matters)
- Designed to suit relatively smaller hubs (as there is only small difference in dimension between inner(d) and outer(D) diameters, as well as its surface pressure is low)
- A wide range of standard inner diameters (from Ø5 to Ø50)
- Simple structure for easier installation & handier maintenance
- Diverse material & finish options available (e.g. stainless steel body for vacuum area, electroless nickel plating etc.)


## Principles

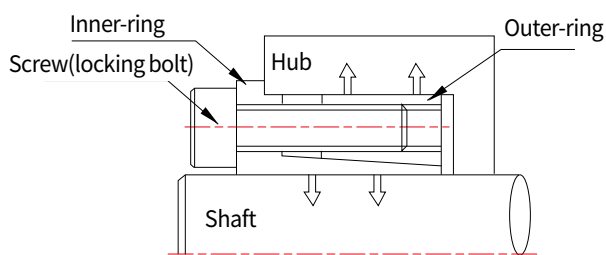

## How to Order



# SAPL-A SERIES : SAPL-A

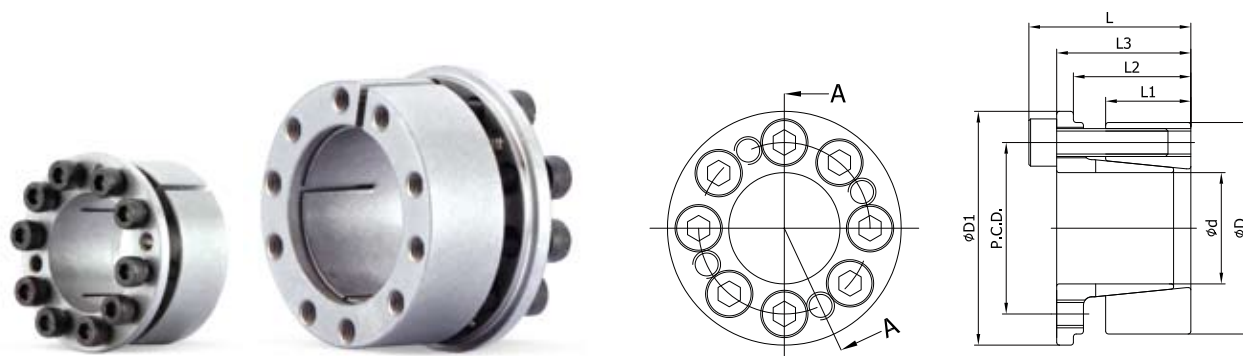

## Dimensions / Performance

Model d x D	Size ( $\pm 0.3\text{mm}$ )						Max. Permissible Torque (Tc) (N·m)	Max. Permissible Thrust Load (Pt) (kN)	Surface Pressure (Mpa)		screw(locking bolt)			Mass(g)
	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L	D <sub>1</sub>	P.C.D			Shaft(Pi)	Hub(Po)	Size	The no. of screws	Fastening Torque (N·m)	
SAPL-A-5 x 16	8	11.2	13	16	18.5	11.7	7	2.8	249	81	M3x10	4	1.9	18
SAPL-A-6 x 19	9	12.3	14.3	18.3	21.5	14	14	4.7	318	102	M4x12	4	3.9	26
SAPL-A-6.35 x 20	9	12.3	14.3	18.3	22.5	14.4	14	4.7	301	97	M4x12	4	3.9	29
SAPL-A-8 x 21	9.3	12.6	14.6	18.6	23.5	15.4	22	5.6	239	107	M4x12	4	3.9	35
SAPL-A-10 x 23	9.5	12.8	14.8	18.8	25.5	17.5	25	5.6	186	96	M4x12	4	3.9	40
SAPL-A-11 x 24	9.5	13.8	15.8	19.8	26.5	18.5	30	5.6	170	92	M4x12	4	3.9	45
SAPL-A-12 x 26	10.5	15.5	18	22	28.5	20.2	50	8.4	233	115	M4x15	6	3.9	53
SAPL-A-14 x 28	10.5	15.5	18	22	30.5	22.2	65	9.5	225	120	M4x15	6	3.9	61
SAPL-A-15 x 29	11.5	16.5	19	23	31.5	23.2	70	9.5	186	106	M4x15	6	3.9	66
SAPL-A-16 x 30	12	17.1	19.6	23.6	33	24.2	75	9.5	166	98	M4x15	6	3.9	75
SAPL-A-17 x 31	12.5	17.6	20.1	24.1	33.5	25.4	110	12.6	197	121	M4x15	8	3.9	75
SAPL-A-18 x 32	12.5	17.6	20.1	24.1	34.5	26.4	115	12.6	186	118	M4x15	8	3.9	80
SAPL-A-19 x 33	12.5	17.6	20.1	24.1	35.5	27.4	120	12.6	177	114	M4x15	8	3.9	81
SAPL-A-20 x 38	15.3	21.1	24.1	29.1	42	30.8	220	21.6	234	139	M5x18	8	8.8	144
SAPL-A-22 x 40	15.3	21.1	24.1	29.1	44	32.8	290	26	256	159	M5x18	8	8.8	165
SAPL-A-24 x 42	16.3	22.1	25.1	30.1	46	34.8	320	26	217	142	M5x18	8	8.8	180
SAPL-A-25 x 43	17.3	23.1	26.1	31.1	47	35.8	350	27.2	216	137	M5x18	8	8.8	188
SAPL-A-28 x 46	17.3	23.1	26.6	31.6	50	38.8	380	27	192	127	M5x18	10	8.8	195
SAPL-A-30 x 48	17.3	23.1	26.6	31.6	52	40.8	410	27	179	122	M5x18	10	8.8	208
SAPL-A-32 x 50	18.3	24.1	27.6	32.6	54	42.8	440	27	156	110	M5x18	10	8.8	219
SAPL-A-35 x 57	19.5	26	30	36	62	48.4	720	41.1	204	138	M6x20	8	15.7	325
SAPL-A-38 x 60	20	26.5	30.5	36.5	65	51.4	770	40.2	178	125	M6x20	10	15.7	362
SAPL-A-40 x 62	20.5	27	31	37	67	53.4	810	40.2	164	118	M6x20	10	15.7	380
SAPL-A-42 x 64	20.5	27	31	37	69	55.4	850	50.2	156	114	M6x20	10	15.7	405
SAPL-A-45 x 67	21	27.5	31.5	37.5	72	58.4	1200	52.9	186	140	M6x20	10	15.7	435
SAPL-A-48 x 70	21	27.5	32	38	75	61.4	1200	48.2	159	123	M6x20	12	15.7	460
SAPL-A-50 x 72	21.5	28	32.5	38.5	77	63.4	1500	56.3	173	136	M6x20	14	15.7	485

- Pt(Max. Permissible Thrust Load) indicates values at the zero(0) torque, and Tc(Max. Permissible Torque) at the zero(0) thrust load respectively. In case torque and thrust load occur simultaneously, please refer to the formula in the [Selection guide] page for combined load calculation.
- For the best performance, make sure all foreign substances e.g. corrosion, dust etc. are removed from each surface of shaft, hub, and A.P. Lock's inner and outer ring.

# SAPL-A SERIES : SAPL-AK



## Dimensions / Performance

Model d x D	Size (±0.3mm)						Max. Permissible Torque (Tc) (N·m)	Max. Permissible Thrust Load (Pt) (kN)	Surface Pressure (Mpa)		screw(locking bolt)			Mass(g)
	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L	D <sub>1</sub>	P.C.D.			Shaft(Pi)	Hub(Po)	Size	The no. of screws	Fastening Torque (N·m)	
SAPL-AK-5 x 16	8	11.2	13	16	18.5	11.7	4.6	1.8	244	51	M3x12	4	1.9	18
SAPL-AK-6 x 19	9	12.3	14.3	18.3	21.5	14	10.7	2.6	256	59	M4x12	4	3.9	26
SAPL-AK-6.35 x 20	9	12.3	14.3	18.3	22.5	14.4	10.7	2.6	270	62	M4x12	4	3.9	29
SAPL-AK-8 x 21	9.3	12.6	14.6	18.6	23.5	15.4	16.6	4.1	244	92	M4x12	4	3.9	35
SAPL-AK-10 x 23	9.5	12.8	14.8	18.8	25.5	17.5	19.6	3.9	192	77	M4x12	4	3.9	40
SAPL-AK-11 x 24	9.5	13.8	15.8	19.8	26.5	18.5	22.5	4	174	73	M4x12	4	3.9	45
SAPL-AK-12 x 26	10.5	15.5	18	22	28.5	20.2	36.2	5.9	239	91	M4x15	6	3.9	53
SAPL-AK-14 x 28	10.5	15.5	18	22	30.5	22.2	50.9	7.2	204	84	M4x15	6	3.9	61
SAPL-AK-15 x 29	11.5	16.5	19	23	31.5	23.2	54.8	7.2	205	90	M4x15	6	3.9	66
SAPL-AK-16 x 30	12	17.1	19.6	23.6	33	24.2	58.8	7.3	193	87	M4x15	6	3.9	75
SAPL-AK-17 x 31	12.5	17.6	20.1	24.1	33.5	25.4	76.4	8.9	205	97	M4x15	8	3.9	75
SAPL-AK-18 x 32	12.5	17.6	20.1	24.1	34.5	26.4	80.3	8.9	166	93	M4x15	8	3.9	80
SAPL-AK-19 x 33	12.5	17.6	20.1	24.1	35.5	27.4	85.2	8.9	184	91	M4x15	8	3.9	81
SAPL-AK-20 x 38	15.3	21.1	24.1	29.1	42	30.8	183	18.3	213	97	M5x18	8	8.8	144
SAPL-AK-22 x 40	15.3	21.1	24.1	29.1	44	32.8	201	18.3	193	92	M5x18	8	8.8	165
SAPL-AK-24 x 42	16.3	22.1	25.1	30.1	46	34.8	252	21	121	105	M5x18	8	8.8	180
SAPL-AK-25 x 43	17.3	23.1	26.1	31.1	47	35.8	264	21.1	212	102	M5x18	8	8.8	188
SAPL-AK-28 x 46	17.3	23.1	26.6	31.6	50	38.8	295	21.1	212	107	M5x18	10	8.8	195
SAPL-AK-30 x 48	17.3	23.1	26.6	31.6	52	40.8	396	26.4	198	102	M5x18	10	8.8	208
SAPL-AK-32 x 50	18.3	24.1	27.6	32.6	54	42.8	423	26	192	103	M5x18	10	8.8	219
SAPL-AK-35 x 57	19.5	26	30	36	62	48.4	548	31.3	207	105	M6x20	8	15.7	325
SAPL-AK-38 x 60	20	26.5	30.5	36.5	65	51.4	741	39	208	110	M6x20	10	15.7	362
SAPL-AK-40 x 62	20.5	27	31	37	67	53.4	779	39	202	110	M6x20	10	15.7	380
SAPL-AK-42 x 64	20.5	27	31	37	69	55.4	823	39.2	192	106	M6x20	10	15.7	405
SAPL-AK-45 x 67	21	27.5	31.5	37.5	72	58.4	882	39.2	184	104	M6x20	10	15.7	435
SAPL-AK-48 x 70	21	27.5	32	38	75	61.4	1117	46.5	206	118	M6x20	12	15.7	460
SAPL-AK-50 x 72	21.5	28	32.5	38.5	77	63.4	1362	54.4	202	119	M6x20	14	15.7	485

- Pt(Max. Permissible Thrust Load) indicates values at the zero(0) torque, and Tc(Max. Permissible Torque) at the zero(0) thrust load respectively. In case torque and thrust load occur simultaneously, please refer to the formula in the [Selection guide] page for combined load calculation.
- For the best performance, make sure all foreign substances e.g. corrosion, dust etc. are removed from each surface of shaft, hub, and A.P. Lock's inner and outer ring.

# SAPL-A SERIES : SAPL-AS



## Dimensions / Performance

Model d x D	Size ( $\pm 0.3\text{mm}$ )						Max. Permissible Torque (Tc) (N·m)	Max. Permissible Thrust Load (Pt) (kN)	Surface Pressure (Mpa)		screw(locking bolt)			Mass(g)
	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	L	D <sub>1</sub>	P.C.D			Shaft(Pi)	Hub(Po)	Size	The no. of screws	Fastening Torque (N·m)	
SAPL-AS-5 x 16	8	11.2	13	16	18.5	11.7	2.8	1.1	204	42	M3x12	4	1.9	18
SAPL-AS-6 x 19	9	12.3	14.3	18.3	21.5	14	7.8	2.5	260	58	M4x12	4	3.9	26
SAPL-AS-8 x 21	9.3	12.6	14.6	18.6	23.5	15.4	10.7	2.6	196	62.6	M4x12	4	2.7	35
SAPL-AS-10 x 23	9.5	12.8	14.8	18.8	25.5	17.5	12.7	2.6	153	55.9	M4x12	4	2.7	40
SAPL-AS-11 x 24	9.5	13.8	15.8	19.8	26.5	18.5	14.7	2.6	139	53.6	M4x12	4	2.7	45
SAPL-AS-12 x 26	10.5	15.5	18	22	28.5	20.2	24.5	4	191	67.1	M4x15	6	2.7	53
SAPL-AS-14 x 28	10.5	15.5	18	22	30.5	22.2	28.4	4	164	62.3	M4x15	6	2.7	61
SAPL-AS-15 x 29	11.5	16.5	19	23	31.5	23.2	30.4	4	136	55	M4x15	6	2.7	66
SAPL-AS-16 x 30	12	17.1	19.6	23.6	33	24.2	32.3	4	121	50.9	M4x15	6	2.7	75
SAPL-AS-17 x 31	12.5	17.6	20.1	24.1	33.5	25.4	46.1	5.4	144	63.1	M4x15	8	2.7	75
SAPL-AS-18 x 32	12.5	17.6	20.1	24.1	34.5	26.4	49	5.4	136	61.2	M4x15	8	2.7	80
SAPL-AS-19 x 33	12.5	17.6	20.1	24.1	35.5	27.4	51.9	5.4	129	59.2	M4x15	8	2.7	81
SAPL-AS-20 x 38	15.3	21.1	24.1	29.1	42	30.8	121.6	12.2	165	69.8	M5x18	8	5.6	144
SAPL-AS-22 x 40	15.3	21.1	24.1	29.1	44	32.8	133.4	12.1	150	66.3	M5x18	8	5.6	165
SAPL-AS-24 x 42	16.3	22.1	25.1	30.1	46	34.8	146.1	12.2	128	59.2	M5x18	8	5.6	180
SAPL-AS-25 x 43	17.3	23.1	26.1	31.1	47	35.8	153	12.2	122	54.5	M5x18	8	5.6	188
SAPL-AS-28 x 46	17.3	23.1	26.6	31.6	50	38.8	213.8	15.2	136	63.7	M5x18	10	5.6	195
SAPL-AS-30 x 48	17.3	23.1	26.6	31.6	52	40.8	229.5	15.3	127	61.1	M5x18	10	5.6	208
SAPL-AS-32 x 50	18.3	24.1	27.6	32.6	54	42.8	244.2	15.2	110	55.4	M5x18	10	5.6	219
SAPL-AS-35 x 57	19.5	26	30	36	62	48.4	301.1	17.2	107	51.4	M6x20	8	9.6	325
SAPL-AS-38 x 60	20	26.5	30.5	36.5	65	51.4	403	21.5	119	59.5	M6x20	10	9.6	362
SAPL-AS-40 x 62	20.5	27	31	37	67	53.4	430.6	21.5	110	56.2	M6x20	10	9.6	380

- Pt(Max. Permissible Thrust Load) indicates values at the zero(0) torque, and Tc(Max. Permissible Torque) at the zero(0) thrust load respectively. In case torque and thrust load occur simultaneously, please refer to the formula in the [Selection guide] page for combined load calculation.
- For the best performance, make sure all foreign substances e.g. corrosion, dust etc. are removed from each surface of shaft, hub, and A.P. Lock's inner and outer ring.